Product Manual Firefighting (Emergency) Robot



RXR-M200D-AHHC Firefighting Robot

It is diesel engine and equipped with an ATV hydraulic tracked chassis, which makes it maneuverable and flexible. It can turn in place, climb slopes, and has strong off-road capabilities. The imported fire cannon with a large flow rate of 150L/s it is equipped with has a long firing range and can effectively meet the needs of fighting large-scale fires. The fire-fighting robot can effectively replace trailer guns and mobile guns. It can remotely control the fire cannon to the required position using its own power, and effectively substitute firefighters to approach the fire source and dangerous areas for reconnaissance, fire fighting and other operations. Operators can carry out fire-fighting operations at a distance outside the fire source, avoiding unnecessary casualties.

Widely applied in:

- Reconnaissance and data collection of dangerous fire targets, reconnaissance, attack and cover of targets, etc.
- Firefighting in situations where large fire trucks and personnel are difficult to approach and rescue and disaster relief in dangerous situations
- For highway (railway) tunnels, subway stations, underground facilities and freight yards









PARAMETER Machine weight 1900kg Overall dimensions(L*W*H) 2310*1460*1860mm Driving speed 0-7.2km/h Diesel fuel tank capacity 60L Hydraulic oil tank capacity 80L Rated working pressure 1MPa Climbing ability 40°

200mm

SVSTEM DADAMETED	
Traction force	15kN
Engine power	46.3kW

Side tilt stability angle 30°

Obstacle crossing height 200mm

Video transmission distance 1000m

Ground clearance

Range of the water cannon 110 m

Max. flow rate of the water cannon

Pitch angle

Slewing angle of the water cannon

±120°

STRONG POWER

Powered by an imported engine; All-terrain tracked drive. It can connect four high-pressure water hoses and drag them to the designated position.


SELF PROTECTION FUNCTION

The robot body is equipped with a fully enclosed automatic water mist spraying protection system. The spraying nozzles form a water mist protection circle, which can effectively prevent the thermal radiation from the surrounding environment from entering and cool down the robot at the same time. It will be automatically turned on during fire fighting operations.

EASY TO OPERATE

The lightweight wireless remote control has a remote control distance of up to 1000 meters and can remotely control all actions of the machine.

SIZE

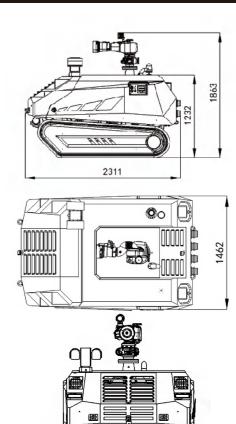

SMOOTH DRIVING

It adopts stepless speed change with two gears of fast and slow, enabling it to travel quickly and also climb slopes and cross obstacles at a low speed.

1460

STRONG THROUGH ABILITY

It adopts a hydraulic tracked walking chassis, which is maneuverable and flexible. It can turn in place, has strong climbing ability, can cross obstacles, has strong off-road capabilities, and is adaptable to complex terrains.

SMOOTH BRAKING

The automatic hydraulic braking device provides stable braking and reliable parking on slopes.

 $\overline{24}$ $\overline{25}$